


## Super Speedfit® – „Quality that connects“

- Simple and fast installation „right first time“
- Ideal for compressed air and liquids
- Quality Manufacturing BS 5750 Part I, ISO 9001, EN 29001
- Mountable without tools
- Quick release of the connection
- No additional sealing material
- Applicable with a variety of metal or Plastic pipes
- Multiple loosening and fastening possible
- Very good flow properties
- Extensive product variety (modular system)
- Protective caps for system protection or colour coding
- KTW and DVGW worksheet W270 tested materials
- National Sanitation Foundation listed (NSF-51 + NSF-61) USA
- Food and Drug Administration (FDA) Materials
- Water Research Centre (WRC) U.K. approved
- SK-release 266-001 for German beverage industry

## John Guest Modular system

The standard series can be combined with each other:

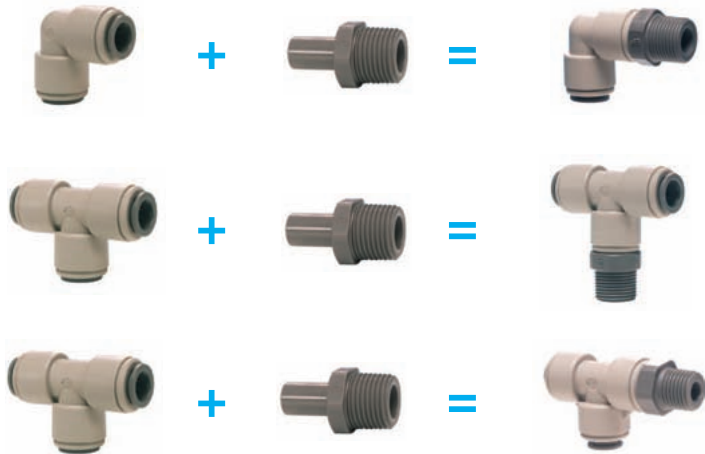

## Comparison of standard sizes → metric dimensions

(for pipe outside diameter)

5/32" → 4,00 mm	1/2" → 12,70 mm
3/16" → 4,80 mm	5/8" → 15,90 mm
1/4" → 6,35 mm	3/4" → 19,05 mm
5/16" → 8,00 mm	1" → 25,40 mm
3/8" → 9,50 mm	

## Extract of our approvals:



since 1989



SK 266-001



National Sanitation  
Foundation Listed



DVGW-Baumusterprüfzertifikat  
DW-8511BU0167  
DW-8306BU0115